

Copy ~~DEF~~

NATIONAL BUREAU OF STANDARDS REPORT

6408

PERFORMANCE TESTS OF
TWO THROW-AWAY TYPE "DUSTGARD" AIR FILTERS

MANUFACTURED BY
AMERICAN ROCK WOOL CORPORATION
WABASH, INDIANA

by

Carl W. Coblentz and Paul R. Achenbach

Report to

Public Buildings Service
General Services Administration
Washington, D. C.



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

THE NATIONAL BUREAU OF STANDARDS

Functions and Activities

The functions of the National Bureau of Standards are set forth in the Act of Congress, March 3, 1901, as amended by Congress in Public Law 619, 1950. These include the development and maintenance of the national standards of measurement and the provision of means and methods for making measurements consistent with these standards; the determination of physical constants and properties of materials; the development of methods and instruments for testing materials, devices, and structures; advisory services to Government Agencies on scientific and technical problems; invention and development of devices to serve special needs of the Government; and the development of standard practices, codes, and specifications. The work includes basic and applied research, development, engineering, instrumentation, testing, evaluation, calibration services, and various consultation and information services. A major portion of the Bureau's work is performed for other Government Agencies, particularly the Department of Defense and the Atomic Energy Commission. The scope of activities is suggested by the listing of divisions and sections on the inside of the back cover.

Reports and Publications

The results of the Bureau's work take the form of either actual equipment and devices or published papers and reports. Reports are issued to the sponsoring agency of a particular project or program. Published papers appear either in the Bureau's own series of publications or in the journals of professional and scientific societies. The Bureau itself publishes three monthly periodicals, available from the Government Printing Office: The Journal of Research, which presents complete papers reporting technical investigations; the Technical News Bulletin, which presents summary and preliminary reports on work in progress; and Basic Radio Propagation Predictions, which provides data for determining the best frequencies to use for radio communications throughout the world. There are also five series of nonperiodical publications: The Applied Mathematics Series, Circulars, Handbooks, Building Materials and Structures Reports, and Miscellaneous Publications.

Information on the Bureau's publications can be found in NBS Circular 460, Publications of the National Bureau of Standards (\$1.25) and its Supplement (\$0.75), available from the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

Inquiries regarding the Bureau's reports should be addressed to the Office of Technical Information, National Bureau of Standards, Washington 25, D. C.

NATIONAL BUREAU OF STANDARDS REPORT

NBS PROJECT

NBS REPORT

1000-30-4830

May 14, 1959

6408

PERFORMANCE TESTS OF
TWO THROW-AWAY TYPE "DUSTGARD" AIR FILTERS

MANUFACTURED BY
AMERICAN ROCK WOOL CORPORATION
WABASH, INDIANA

by

Carl W. Coblentz and Paul R. Achenbach
Air Conditioning, Heating, and Refrigeration Section
Building Technology Division

to

Public Buildings Service
General Services Administration
Washington, D. C.

IMPORTANT NOTICE

NATIONAL BUREAU OF STANDARDS
intended for use within the
to additional evaluation and
listing of this Report, either
the Office of the Director,
however, by the Government
to reproduce additional copies

Approved for public release by the
Director of the National Institute of
Standards and Technology (NIST)
on October 9, 2015.

progress accounting documents
formally published it is subjected
to reproduction, or open-literature
permission is obtained in writing from
Such permission is not needed,
if that agency wishes



U. S. DEPARTMENT OF COMMERCE
NATIONAL BUREAU OF STANDARDS

PERFORMANCE TESTS OF TWO THROW-AWAY TYPE "DUSTGARD" AIR FILTERS

by

Carl W. Coblentz and Paul R. Achenbach

1. INTRODUCTION

At the request of the Public Buildings Service, General Services Administration, the performance characteristics of two specimens of the same model of throw-away type "Dustgard" air filters were determined. The scope of this investigation included the determination of the arrestance of Cottrell precipitate and atmospheric dust, the dust holding capacity and the pressure drop at an air flow rate of 800 cfm.

2. DESCRIPTION OF THE TEST SPECIMENS

The test specimens were manufactured and supplied for test purposes by the American Rock Wool Corporation of Wabash, Indiana, and were identified by their trade name, "Dustgard." The filter media were 2-in. thick pads of light gray colored non-combustible fibers and were treated with an oily adhesive. The cardboard frames measured 20 x 20 x 2 in. on the outside; they consisted of a U-shaped channel, leaving a $17 \frac{5}{8}$ in. square opening, i.e., 2.16 sq ft net face area. The weights of the two test specimens were 435 grams and 438 grams, respectively (approximately 15 $\frac{1}{2}$ oz).

3. TEST METHOD AND PROCEDURE

The performance of the filters was determined at 370 ft/min face velocity, i.e., at an air flow rate of 800 cfm. The arrestance measurements were conducted in accordance with the NBS "Dust Spot Method" as described in the paper, "A Test Method for Air Filters" by R. S. Dill (ASHVE Transactions, Vol. 44, p. 379, 1938).

The aerosol used for the arrestance determination was Cottrell precipitate which had been sifted through a 100-mesh wire screen. In order to simulate actual operating conditions when loading the filters, four percent by weight of cotton linters, previously ground in a Wiley mill with a four-millimeter screen,

was introduced simultaneously with the Cottrell precipitate. The pressure drop of the filters was recorded after each increment of 20 grams of dust had been introduced into the test apparatus. Whereas the arrestance determinations were made with 100 percent Cottrell precipitate, cotton linters were added to retain a ratio of four parts by weight to every 96 parts of Cottrell precipitate, including that amount used for arrestance measurements. Arrestance determinations were made at the beginning and at the end of the loading of each filter and also at several intermediate load conditions.

Before introducing dust, the pressure drop of the first test specimen was determined at five different air flow rates from 420 cfm to 1200 cfm, corresponding to face velocities of 194 ft/min to 555 ft/min. Two arrestance determinations were made on the second test specimen using the laboratory air as the aerosol without addition of further particulate matter, before arrestance determinations were made with Cottrell precipitate.

The filters were loaded with a dust concentration of approximately 1 gram of dust in 1000 cu ft of air until the pressure drop exceeded 0.5 in. W.G., at which point the test was discontinued.

4. TEST RESULTS

Table 1 shows the pressure drops of the first filter before the loading test at air flow rates from 420 cfm to 1200 cfm, i.e., face velocities of 194 ft/min to 555 ft/min. The pressure drop of the filter increased from 0.030 in. W.G. at the lowest flow rate to 0.168 in. W.G. at the highest flow rate and was 0.088 in. W.G. at the rated face velocity of 370 ft/min.

Table 1

Pressure Drop of Clean Filter, Specimen 1

<u>Air Flow Rate, cfm</u>	<u>Face Velocity, ft/min</u>	<u>Pressure Drop, in. W.G.</u>
420	194	0.030
600	278	0.055
800	370	0.088
1000	463	0.125
1200	555	0.168

Table 2

Performance of Filter Specimen 1 at 800 cfm
(370 ft/min Face Velocity)

<u>Dust Load</u> g/sq ft	<u>Pressure Drop</u> in. W.G.	<u>Arrestance</u> %
0	0.088	-
7	0.097	48*
54	0.180	54
118	0.300	63*
142	0.367	64*
190	0.516	65

* Average of two tests

Table 3


Performance of Filter Specimen 2 at 800 cfm
(370 ft/min Face Velocity)

<u>Dust Load</u> g/sq ft	<u>Pressure Drop</u> in. W.G.	<u>Arrestance</u> %
0	0.089	6.4(Note A)
5	0.097	50*
94	0.272	70*
124	0.336	71*
158	0.442	72*
177	0.521	73

Note A: This value presents the average of two tests in which the laboratory air with its suspended particulate matter was the aerosol.

* Average of two tests

Tables 2 and 3 show the pressure drops and arrestance values determined during the loading of the two test specimens. These data are presented graphically in Fig. 1 as four smooth curves drawn to approximately fit the individual points of observation. It will be noted that the arrestance determined with the second filter using the particulate matter of the laboratory air as an aerosol is not shown on this graph.

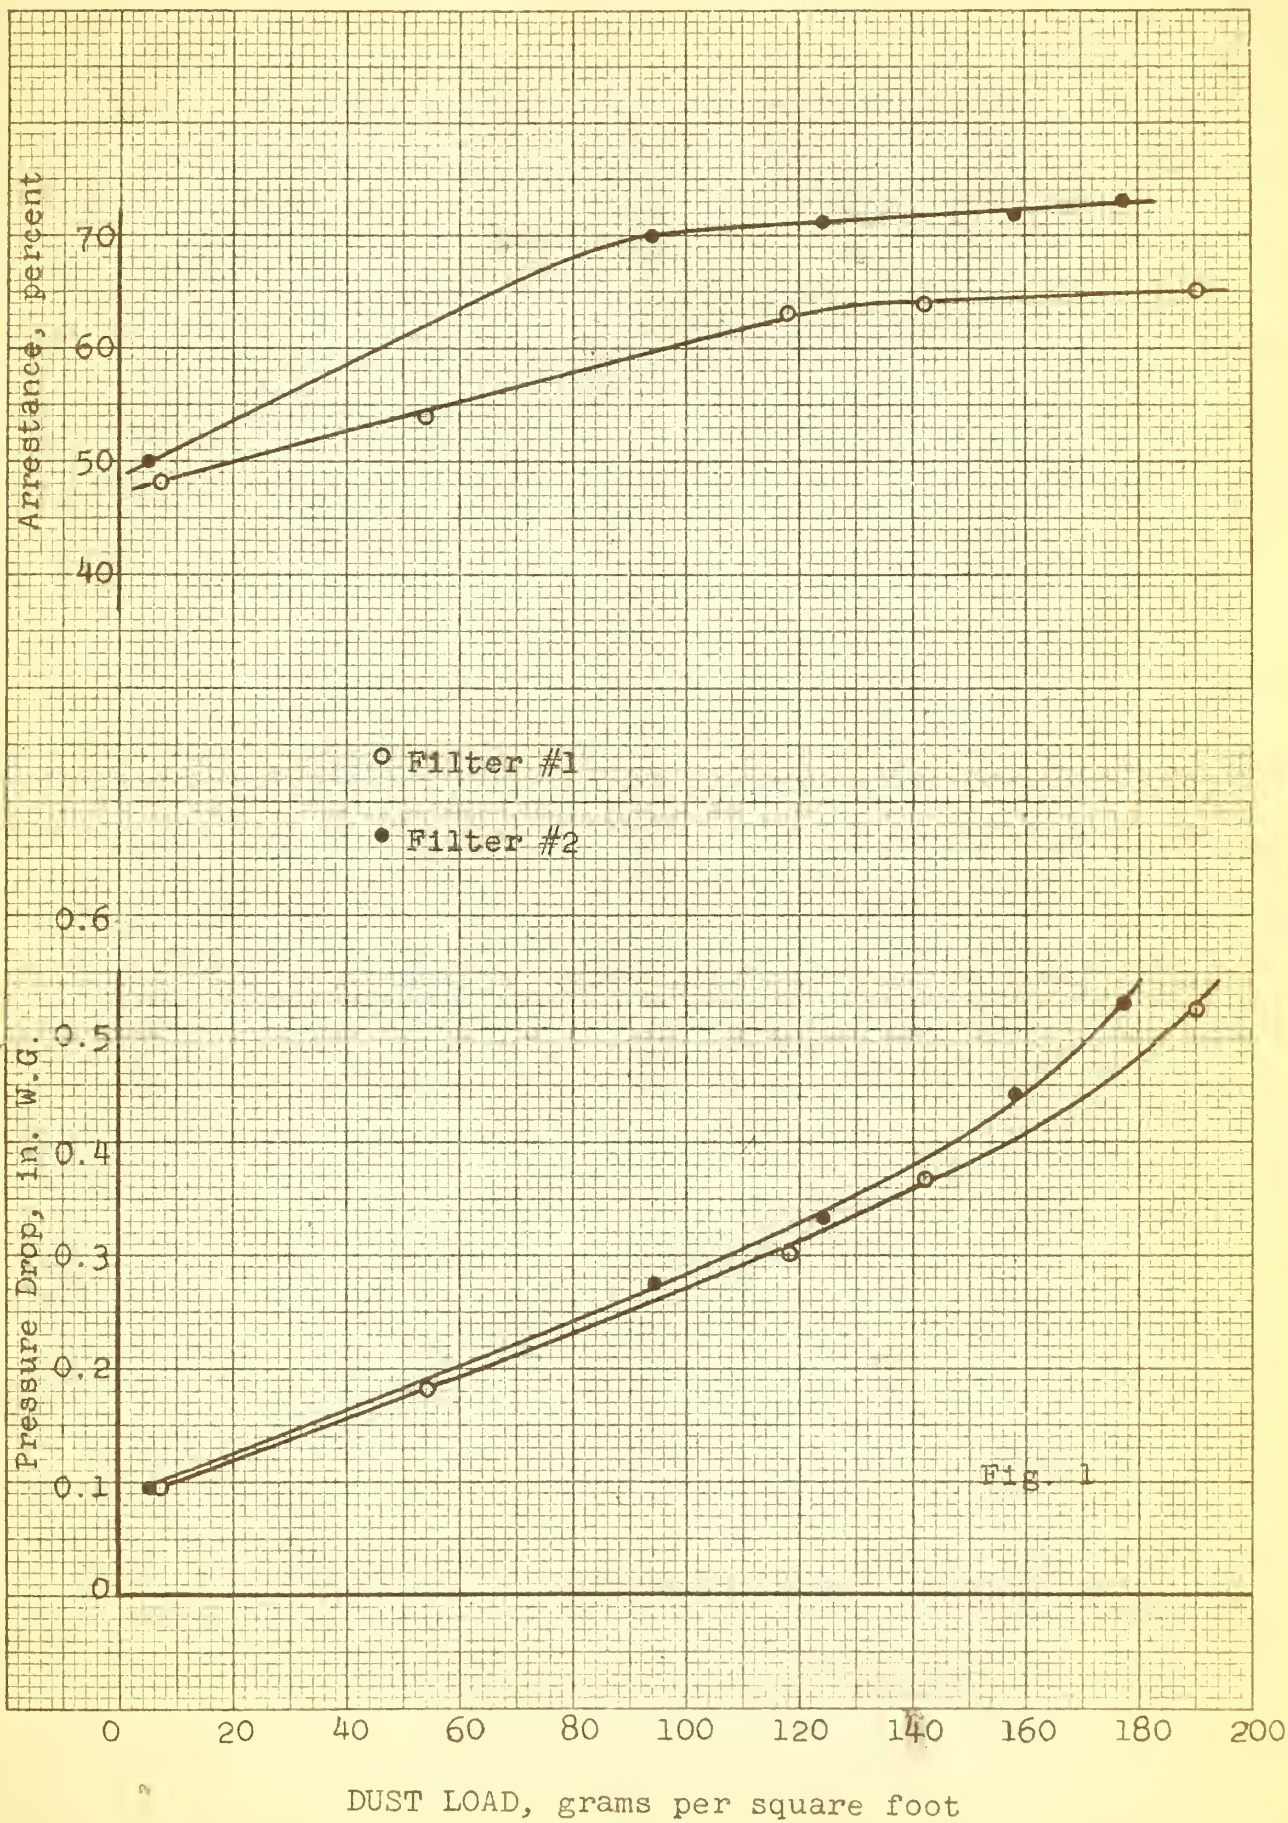

The dust load values shown in Tables 2 and 3 are the amount of dust introduced into the test apparatus divided by the net face area of the filter and diminished by the percentage of dust fallout upstream of the filter. This fallout was determined at the conclusion of each test by sweeping out the test apparatus and calculating the ratio of fallout to the total dust introduced into the system.

The dust loads accumulated on the two test specimens when the pressure drop had increased to 0.5 in. W.G. were taken from the lower curves of Fig. 1 and are shown in Table 4 as the "Dust Holding Capacity." Also indicated in this table are the "Mean Arrestance" values, which represent the average arrestance during the period in which the capacity dust load was accumulated, taken from the arrestance curves of Fig. 1.

Table 4

Dust Holding Capacity and Mean Arrestance
(Determined from Fig. 1)

Filter Specimen No.	1	2
Dust Holding Capacity, grams/sq ft	186	173
Mean Arrestance, percent	59	65

Although no difference had been noticed in the appearance of the two filters before or after the tests, the observed arrestances were significantly different. No definite reason for the cause of this difference can be ~~made~~ OFFERED

The differences in the results obtained on the two specimens probably represent variations in the density or uniformity of the media or variations in the amount of adhesive on the media at the start of the test. However, the operation of the second specimen with laboratory air as the aerosol for about two hours prior to the first test with Cottrell precipitate may have had a small effect on the results. During the two hours' operation with atmospheric air as the aerosol, the pressure drop across specimen No. 2 increased from 0.089 in. W.G. to 0.094 in. W.G. indicating that the dust deposit had a measurable effect on the density of the media. It is probable that this deposit consisted principally of fine particles which penetrated into the media and some lint on the upstream surface.

Since the two specimens were tested one after the other by the same personnel, it seems unlikely that the manipulations of the operator were responsible for the observed differences in test results.

U. S. DEPARTMENT OF COMMERCE

Lewin L. Strauss, *Secretary*

NATIONAL BUREAU OF STANDARDS

A. V. Astlin, *Director*



THE NATIONAL BUREAU OF STANDARDS

The scope of activities of the National Bureau of Standards at its headquarters in Washington, D. C., and its major laboratories in Boulder, Colo., is suggested in the following listing of the divisions and sections engaged in technical work. In general, each section carries out specialized research, development, and engineering in the field indicated by its title. A brief description of the activities, and of the resultant publications, appears on the inside front cover.

WASHINGTON, D. C.

Electricity and Electronics. Resistance and Reactance. Electron Devices. Electrical Instruments. Magnetic Measurements. Dielectrics. Engineering Electronics. Electronic Instrumentation. Electrochemistry.

Optics and Metrology. Photometry and Colorimetry. Optical Instruments. Photographic Technology. Length. Engineering Metrology.

Heat. Temperature Physics. Thermodynamics. Cryogenic Physics. Rheology. Engine Fuels. Free Radicals Research.

Atomic and Radiation Physics. Spectroscopy. Radiometry. Mass Spectrometry. Solid State Physics. Electron Physics. Atomic Physics. Neutron Physics. Radiation Theory. Radioactivity. X-rays. High Energy Radiation. Nucleonic Instrumentation. Radiological Equipment.

Chemistry. Organic Coatings. Surface Chemistry. Organic Chemistry. Analytical Chemistry. Inorganic Chemistry. Electrodeposition. Molecular Structure and Properties of Gases. Physical Chemistry. Thermochemistry. Spectrochemistry. Pure Substances.

Mechanics. Sound. Mechanical Instruments. Fluid Mechanics. Engineering Mechanics. Mass and Scale. Capacity, Density, and Fluid Meters. Combustion Controls.

Organic and Fibrous Materials. Rubber. Textiles. Paper. Leather. Testing and Specifications. Polymer Structure. Plastics. Dental Research.

Metallurgy. Thermal Metallurgy. Chemical Metallurgy. Mechanical Metallurgy. Corrosion. Metal Physics.

Mineral Products. Engineering Ceramics. Glass. Refractories. Enameled Metals. Concreting Materials. Constitution and Microstructure.

Building Technology. Structural Engineering. Fire Protection. Air Conditioning, Heating, and Refrigeration. Floor, Roof, and Wall Coverings. Codes and Safety Standards. Heat Transfer.

Applied Mathematics. Numerical Analysis. Computation. Statistical Engineering. Mathematical Physics.

Data Processing Systems. SEAC Engineering Group. Components and Techniques. Digital Circuitry. Digital Systems. Analog Systems. Application Engineering.

• Office of Basic Instrumentation.

• Office of Weights and Measures.

BOULDER, COLORADO

Cryogenic Engineering. Cryogenic Equipment. Cryogenic Processes. Properties of Materials. Gas Liquefaction.

Radio Propagation Physics. Upper Atmosphere Research. Ionospheric Research. Regular Propagation Services. Sun-Earth Relationships. VHF Research. Ionospheric Communication Systems.

Radio Propagation Engineering. Data Reduction Instrumentation. Modulation Systems. Navigation Systems. Radio Noise. Tropospheric Measurements. Tropospheric Analysis. Radio Systems Application Engineering. Radio-Meteorology.

Radio Standards. High Frequency Electrical Standards. Radio Broadcast Service. High Frequency Impedance Standards. Electronic Calibration Center. Microwave Physics. Microwave Circuit Standards.

